

SEC-RJMT**POWERFUL ATTACHMENTS FOR MAHINDRA TRACTORS****SHIV ENGG.****LOADER S-2224****SPECIFICATIONS:-**

Max. Operating Height	: 3360 mm
Pin Height	: 2780 mm
Load Over Height	: 2640 mm
Full Dump Height	: 2260 mm
Bucket Rated Capacity	: 0.3 m ³
Safe Working Load	: 300 Kg.



- Counter Weight Mount On Three Point Linkage.
- Operated By Tractor Hydraulic System.

LOADER S-2219 STANDARD BUCKET**SPECIFICATIONS:-**

Max. Operating Height	: 4400 mm
Pin Height	: 3700 mm
Load Over Height	: 3420 mm
Full Dump Height	: 2930 mm
Bucket Rated Capacity	: 0.45/0.50 m ³
Safe Working Load	: 500/800 Kg.



- Counter Weight Mount On Three Point Linkage.
- Operated By Tractor Hydraulic System.

**SIX-IN-ONE**

Max. Operating Height	: 4290/4520 mm
Pin Height	: 3440/3700 mm
Load Over Height	: 3240/3420 mm
Full Dump Height	: 3240/3420 mm
Bucket Rated Capacity	: 0.65/0.65 m ³
Safe Working Load	: 950/950 Kg.

**GRAB BUCKET**

Max. Operating Height	: 4450/4651 mm
Pin Height	: 3440/3700 mm
Load Over Height	: 3240/3420 mm
Full Dump Height	: 2700/2930 mm
Bucket Rated Capacity	: 0.7/0.7 m ³
Safe Working Load	: 900/900 Kg.

**SUGARCANE GRABBER**

Max. Operating Height	: 6270 mm
Pin Height (Grabber Arm Jaw)	: 5391 mm
Load Over Height	: 4765 mm
Reach At Dump	: 1800 mm
Safe Working Load	: 550 Kg.

**PALLET FORK**


Pin Height	: 3440/3700 mm
Load Over Height	: 3240/3420 mm
Safe Working Load	: 1050 kg.

Low Cost, Low Maintenance, High Reliability, High Performance, Powerful Hydraulic System

SEC-RJMT

LOADER S-2212
(Hi-Dump Bucket)

- Counter Weight Mount On Chassis.
- Loader Operated By Independent Hydraulic System.
- Compact Construction & Rigid Structure.

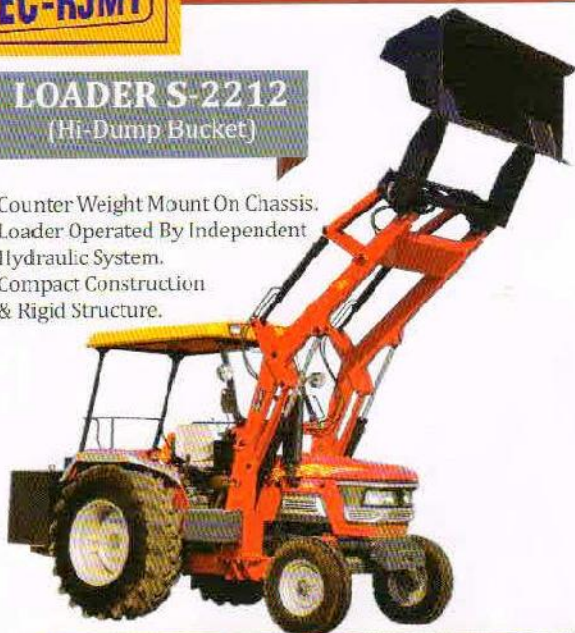

LOADER S-2212 II
(Std. Bucket)

- Counter Weight Mount On Chassis.
- Loader Operated By Independent Hydraulic System.
- Compact Construction & Rigid Structure.



SPECIFICATIONS	STANDARD BUCKET		HI - DUMP BUCKET	
	S-2212 II	S-2212	S-2212 II	S-2212
Max. Operating Height	4400 mm	4200 mm	4950 mm	4860 mm
Pin Height	3700 mm	3440 mm	4375 mm	4170 mm
Load Over Height	3420 mm	3240 mm	4298 mm	4100 mm
Full Dump Height	2930 mm	2700 mm	4200 mm	4030 mm
Bkt. Rated Capacity	0.65 cu.m.	0.65 cu.m	0.65 cu.m	0.65 cu.m
Safe Working Load	1050 KG.	1050 KG.	950 KG.	950 KG.

LOADER BACKHOE S-2216
(Hi-Dump Bucket)

SPECIFICATIONS OF BACKHOE:-

- Max. Operating Height : 5490 mm
- Load Over Height : 4060 mm
- Digging Depth : 2500 mm
- Maximum Reach : 4350 mm
- Bucket Rated Capacity : 0.18 m³

SPECIFICATIONS OF LOADER:-

- Max. operating Height : 4860 mm
- Pin Height : 4170 mm
- Load Over Height : 4100 mm
- Full Dump Height : 4030 mm
- Bucket Rated Capacity : 0.65 m³
- Safe Working Load : 950 Kg.



SEC-RJMT

Mfd. By : **SEC-RJMT ENGINEERING PVT. LTD.**
Office: Plot No. 2, Pyala Road, Seekri, Opp. Shiv Mandir,
Ballabgarh-121004 Faridabad (HR). Contact No. : 0129-2225050/40
E-Mail: marketing@secrjmt.com, secrjmt1@rediffmail.com
Website: www.secrjmt.com

All information are of general nature only (Variable ± 2%). We reserve the right to change specification without any prior notice.
MULTIPLE APPLICATION, GLOBAL TECHNOLOGY.....
TESTED, TRIED & ROBUST ATTACHMENTS.....